



Longchuan Industry District, Yangquan, 045200, P.R. China

# CQLite™ – Technical Specifications

- Manufactured and Delivered by; ChangQing Proppant Corporation
- High quality proppant with high flow rates in both initial and postproduction stages for greater production and less drop-off.
- Perfect application for moderate well depth.
- Available in standard sizes: 20/40, 30/50 and 40/70

Physical Properties	CQLite™		
	US Mesh	Weight % Retained	
	20/40	30/50	40/70
18	0		
20	1.8		
25	42.0		
30	43.9	0.6	
35	12.1	10.2	
40	0.2	51.8	0.5
45	0.1	34.8	43.5
50	0.1	2.4	47.5
60		0.1	7.5
70			0.9
100			0.2
% in size	98.2	99.3	99.3
Median Diameter, mm	0.691	0.444	0.351
Crush fines *% by weight generated:			
@ 5,000 psi	≤ 1.0	≤ 1.0	≤ 1.0
@ 7,500 psi	≤ 3.0	≤ 2.0	≤ 1.0
@10,000 psi	≤ 7.0	≤ 5.0	≤ 3.0
@12,500psi	≤ 10.0	≤ 8.0	≤ 4.0
@15,000psi			
Sphericity	≥ 0.8	≥ 0.8	≥ 0.8
Roundness	≥ 0.8	≥ 0.8	≥ 0.8
Acid Solubility, %	≤ 5.0	≤ 5.0	≤ 5.0
Bulk Density, g/cc	1.40 – 1.60	1.40 – 1.60	1.40 – 1.60
Bulk Density, lb/cuft	90 – 100	90 – 100	90 – 100
Specific Gravity, g/cc	2.60 – 2.80	2.60 – 2.80	2.60 – 2.80
Absolute Volume, gal/lb	0.044	0.043	0.043
Turbidity, FTU	47-	55	53



Longchuan Industry District, Yangquan, 045200, P.R. China


Long-term Conductivity (2 lb/ft<sup>2</sup>, 250°F, with 2% KCl, Between Ohio sandstone)

Conductivity (md-ft):

Closure Stress (psi)	20/40	30/50	40/70
2,000	9,058	3,512	2,375
4,000	8,257	3,001	1,815
6,000	6,085	2,517	1,513
8,000	3,785	1,825	1,135
10,000	1,635	1,212	764
12,000	759	688	424
15,000		457	233


Permeability (Darcies):

Closure Stress (psi)	20/40	30/50	40/70
2,000	509	202	137
4,000	479	177	107
6,000	365	153	92
8,000	236	114	71.2
10,000	105	77.6	49.2
12,000	50	45.8	28.4
14,000		31.6	16.2

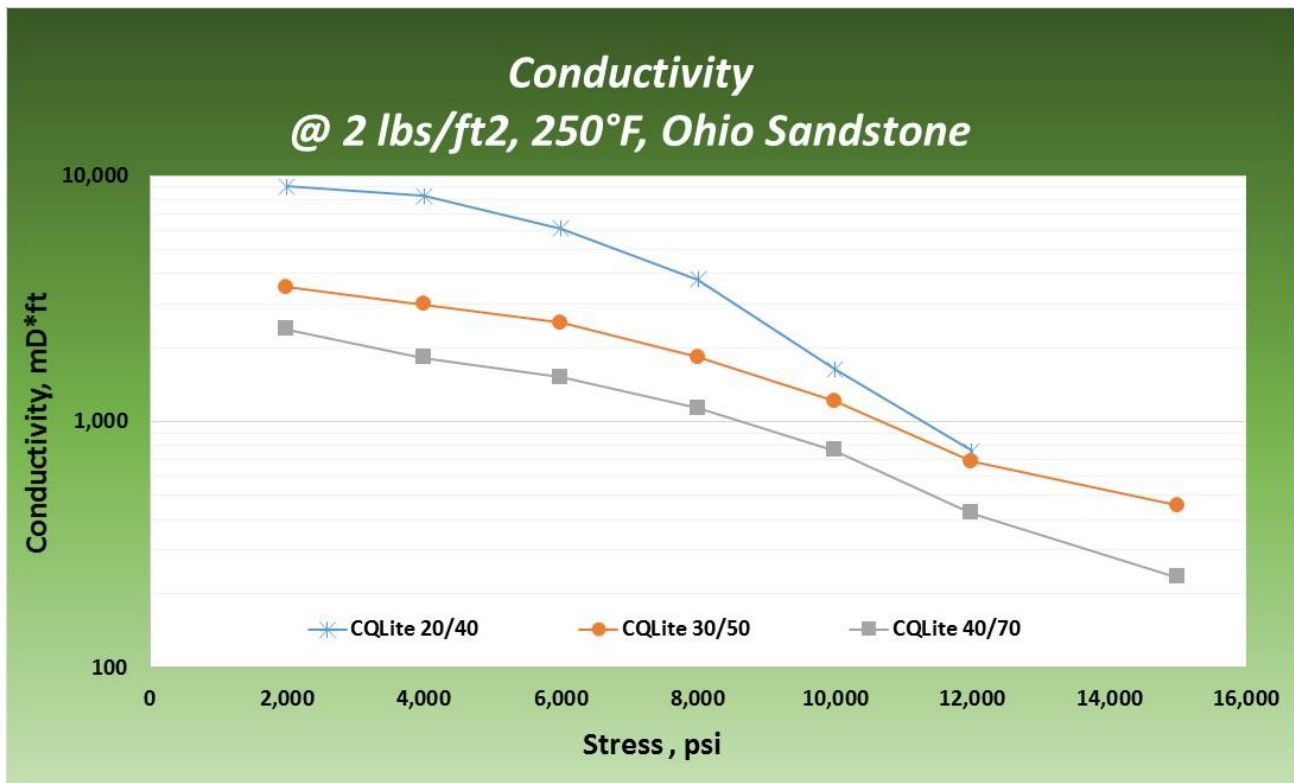



Longchuan Industry District, Yangquan, 045200, P.R. China

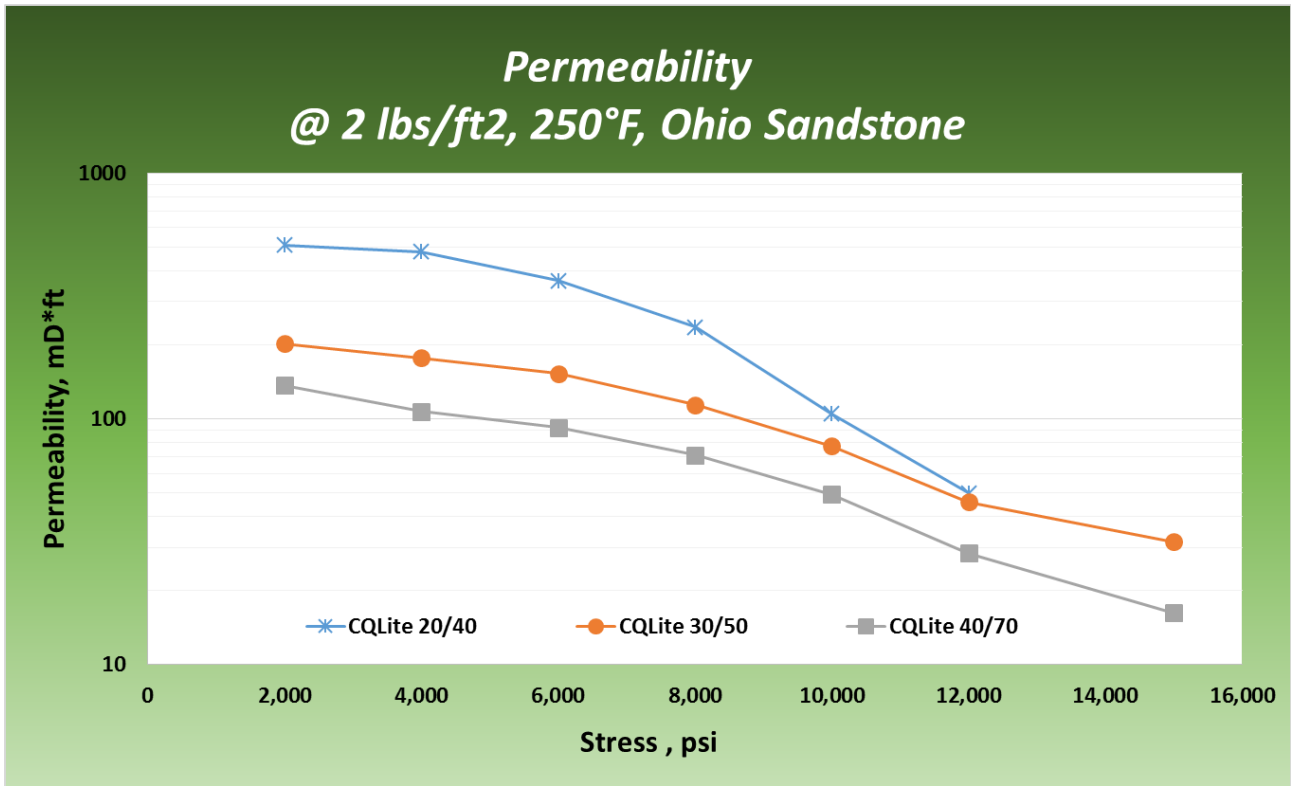

All the above data are typical values obtained according to ISO 13503-2/API RP 19C, and ISO 13503-5. Actual conductivity may vary substantially due to gel damage, fines migration, and other factors.

For more information, please contact us at [contact@cqprop.com](mailto:contact@cqprop.com).